


Konfiguracja routera TP-Link Archer C2

1

Zaloguj się do strony konfiguracyjnej routera.
Na komputerze albo laptopie podłączonym do routera należy otworzyć przeglądarkę internetową i na górze w pasku adresowym wpisać stronę "192.186.0.1".


2

Domyślne dane do logowania to
"admin" jako login i "admin" jako hasło.
Ewentualnie router może poprosić o nadanie
nowych danych do logowania (przy pierwszym uruchomieniu).

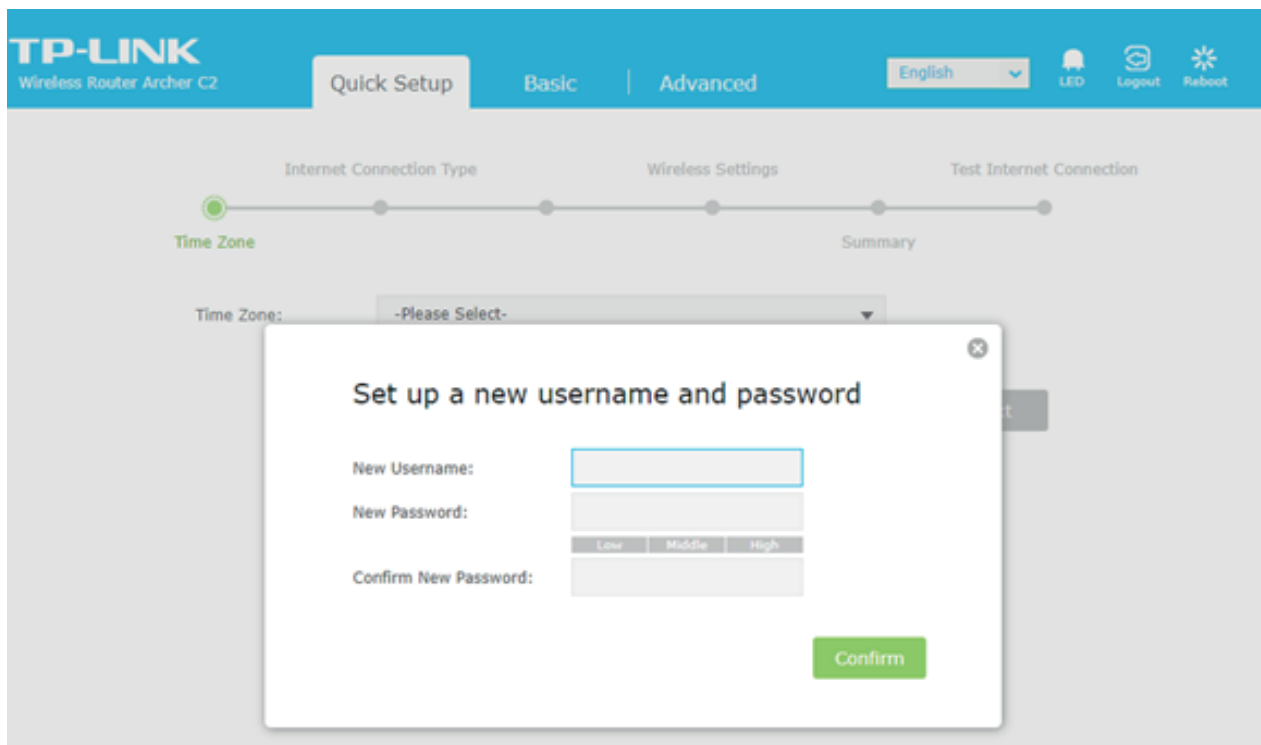

3

Po zalogowaniu się do routera wybieramy zakładkę "Quick Setup" i w pierwszym kroku wybieramy strefę czasową po czym klikamy "Next"

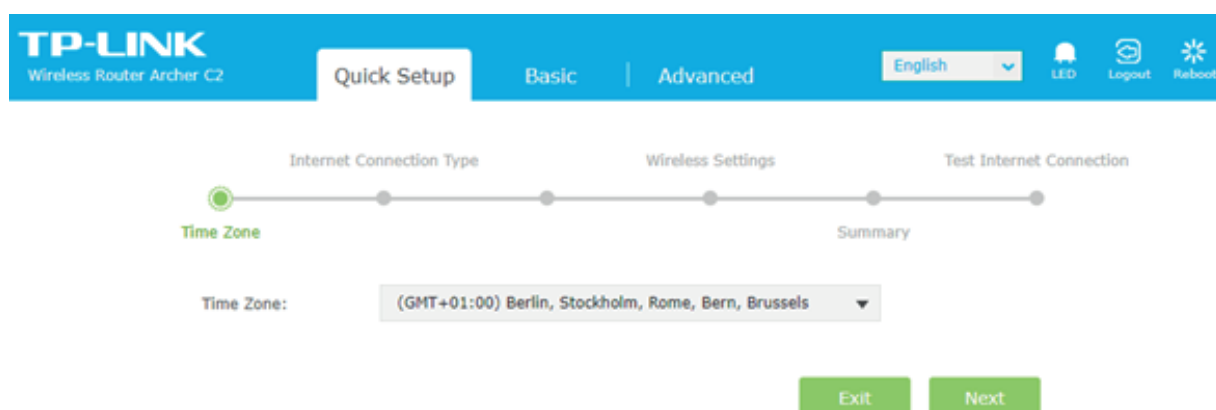

TP-LINK
Wireless Router Archer C2

Quick Setup | Basic | Advanced

English | LED | Logout | Reboot

Internet Connection Type | Wireless Settings | Test Internet Connection


Time Zone | Summary

Time Zone: (GMT+01:00) Berlin, Stockholm, Rome, Bern, Brussels

Exit Next

4

W następnym kroku wybieramy "Dynamic IP" i klikamy "Next":

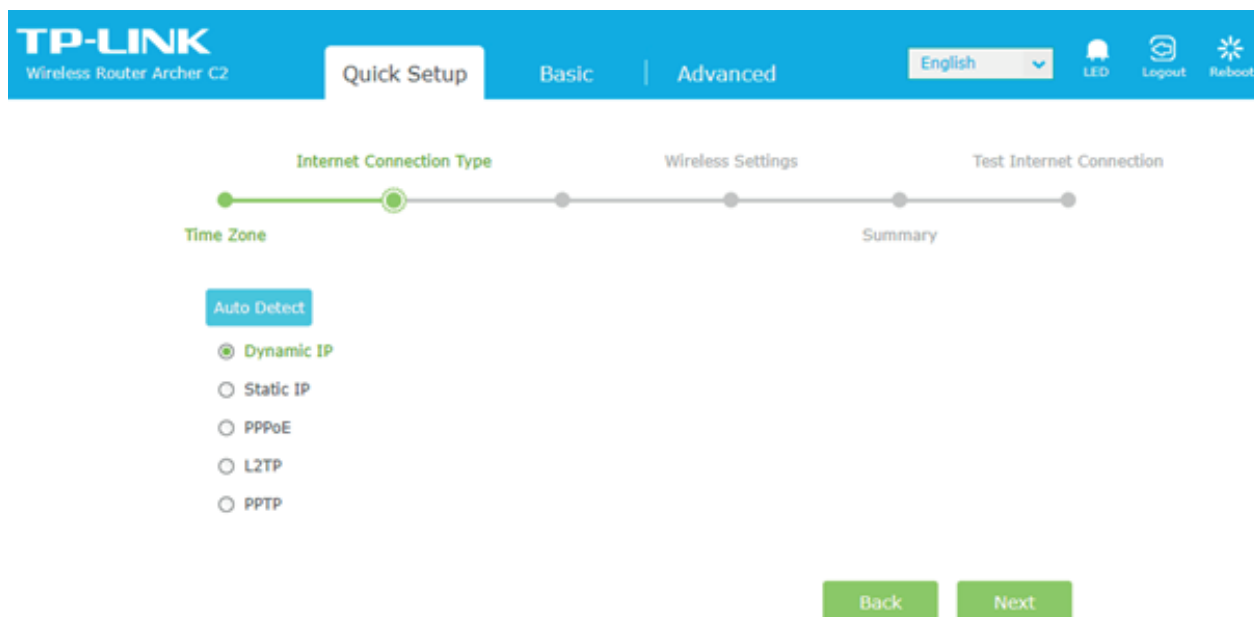

TP-LINK
Wireless Router Archer C2

Quick Setup | Basic | Advanced

English | LED | Logout | Reboot

Internet Connection Type | Wireless Settings | Test Internet Connection

Time Zone | Summary

Auto Detect

☒ Dynamic IP

☐ Static IP

☐ PPPoE


☐ L2TP

☐ PPTP

Back Next

5

Przechodząc dalej wybieramy opcję
"Do NOT Clone MAC Address" i klikamy "Next":

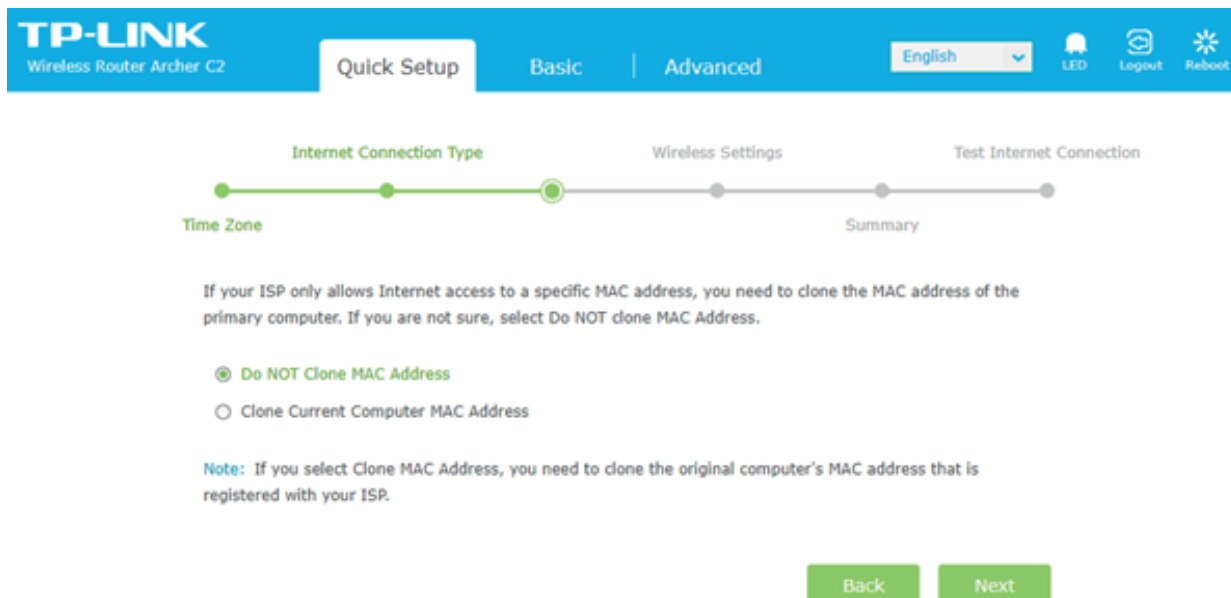

TP-LINK
Wireless Router Archer C2

Quick Setup | Basic | Advanced

English | LED | Logout | Reboot

Internet Connection Type | Wireless Settings | Test Internet Connection

Time Zone | Summary

If your ISP only allows Internet access to a specific MAC address, you need to clone the MAC address of the primary computer. If you are not sure, select Do NOT clone MAC Address.


☒ Do NOT Clone MAC Address
☐ Clone Current Computer MAC Address

Note: If you select Clone MAC Address, you need to clone the original computer's MAC address that is registered with your ISP.

Back Next

6

W następnym kroku "Wireless Settings" możemy ustawić nazwę oraz hasła do sieci WiFi lub zostawić je domyślnie.
Ważne, aby nazwa sieci 2.4GHz i 5GHz różniły się od siebie.
Po ustawieniu klikamy "Next":

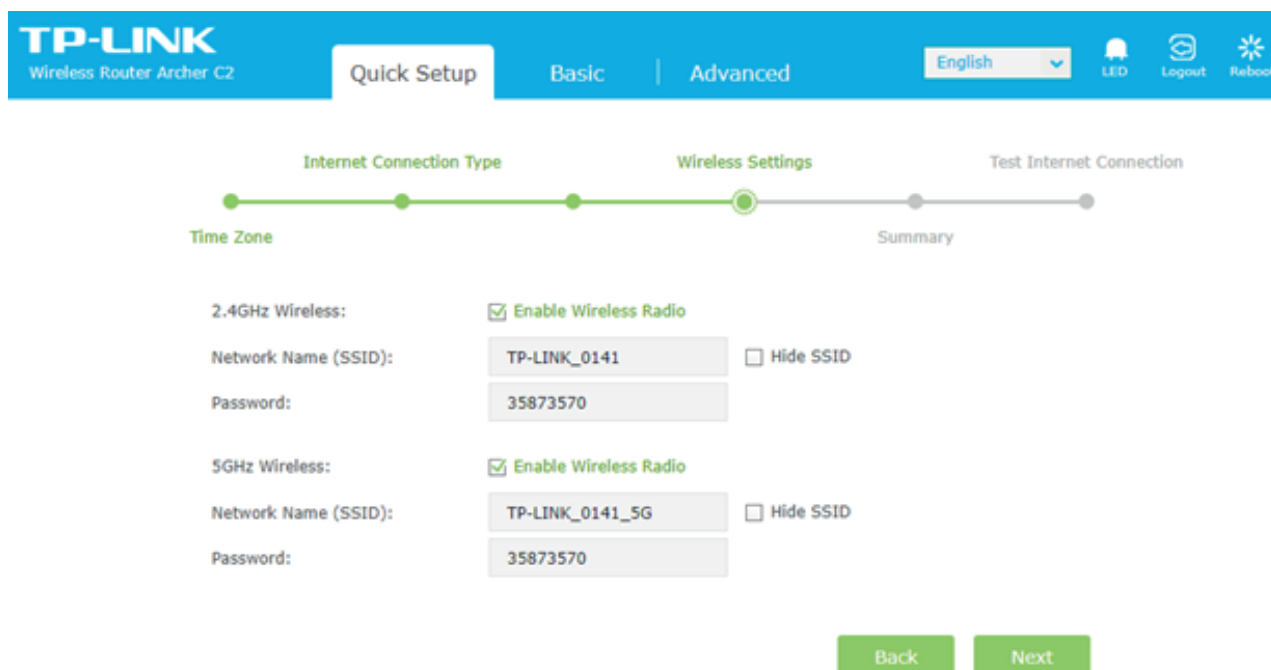

TP-LINK
Wireless Router Archer C2

Quick Setup | Basic | Advanced

English | LED | Logout | Reboot

Internet Connection Type | Wireless Settings | Test Internet Connection

Time Zone | Summary

2.4GHz Wireless: ☒ Enable Wireless Radio

Network Name (SSID): TP-LINK_0141 ☐ Hide SSID

Password: 35873570

5GHz Wireless: ☒ Enable Wireless Radio


Network Name (SSID): TP-LINK_0141_5G ☐ Hide SSID

Password: 35873570

Back Next

7

W oknie "Summary" jeżeli wszystko wyświetla się poprawnie klikamy "Save":

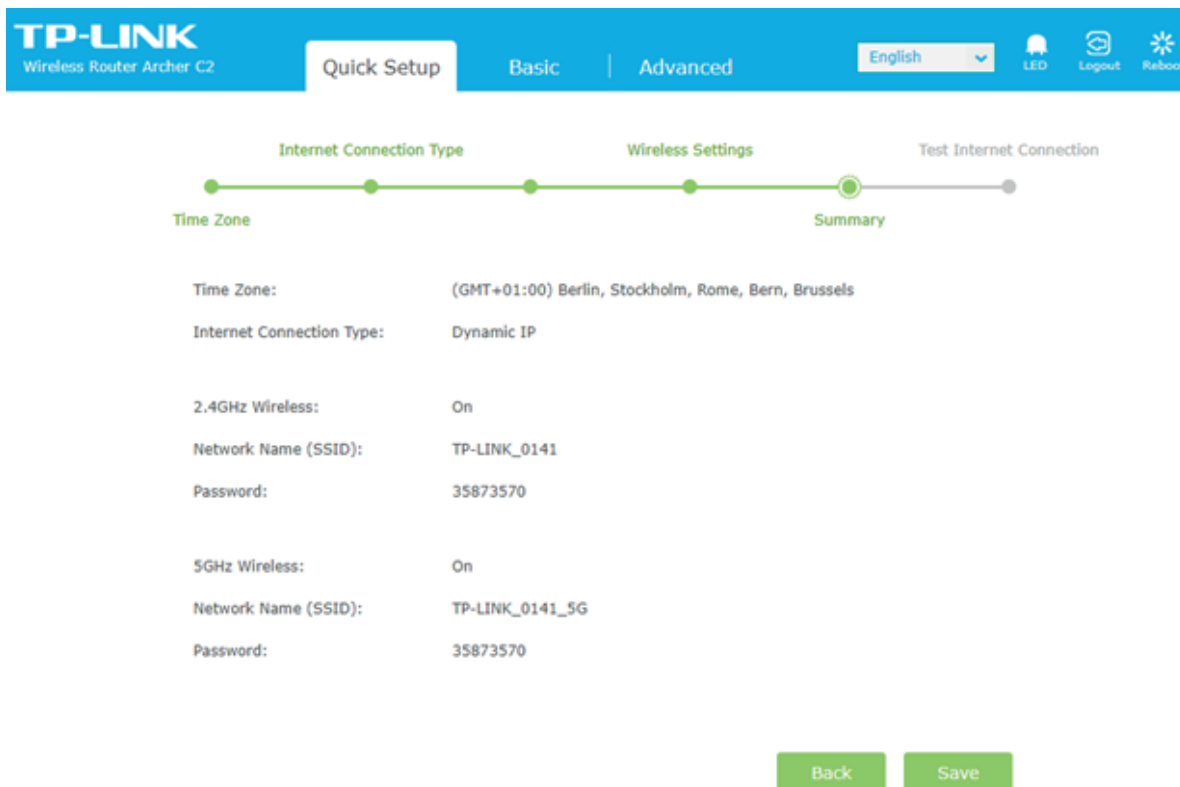

The screenshot shows the TP-LINK Archer C2 Quick Setup interface. At the top, there's a blue header with the TP-LINK logo, 'Wireless Router Archer C2', and tabs for 'Quick Setup', 'Basic', and 'Advanced'. The 'Quick Setup' tab is active. Below the header, there's a progress bar with five steps: 'Time Zone', 'Internet Connection Type', 'Wireless Settings', 'Summary', and 'Test Internet Connection'. The 'Summary' step is currently selected and highlighted. Below the progress bar, the configuration details are listed:

Time Zone:	(GMT+01:00) Berlin, Stockholm, Rome, Bern, Brussels
Internet Connection Type:	Dynamic IP
2.4GHz Wireless:	On
Network Name (SSID):	TP-LINK_0141
Password:	35873570
5GHz Wireless:	On
Network Name (SSID):	TP-LINK_0141_5G
Password:	35873570

At the bottom right, there are two green buttons: 'Back' and 'Save'.

8

Po zapisaniu, router jest skonfigurowany i gotowy do działania (może wylogować ze strony konfiguracyjnej).
Jeżeli urządzenie jest pierwszy raz używane, to należy je jeszcze uwierzytelnić w sieci, aby miało dostęp do internetu.